

MAYTAG

Dependable Care Dryer Service Manual Supplement

Attached is Supplement One for service manual **16008878**.

This Maytag Dryer Service Manual supplement covers **Models MD2300, MD2500 and MD3500**. The following information is supplemental to the information found in the basic manual part number 16008878. Please refer to this manual for detailed service information. These products incorporate the same drying systems found on the Dependable Care Dryer Line.

We suggest you file this with your **16008878** Manual for reference.

SECTION 4 - CONSOLE ASSEMBLY	4-1
REMOVAL	4-1
VERTICAL SWITCHES	4-2
HORIZONTAL SWITCHES	4-2
TIMER REMOVAL	4-2
CONTROL FACIA	4-3
SECTION 5 - CABINET ASSEMBLY COMPONENTS	5-1
DOOR ASSEMBLY & HINGES	5-1
FRONT PANEL	5-1
TOP COVER	5-2
SECTION 6 - TUMBLER & BULKHEADS	6-1
SHROUD & TUMBLER FRONT ASSEMBLY	6-1
LINT FILTER	6-2
BEARING & PADS	6-2
TUMBLER FRONT SEAL	6-3
TUMBLER & BELT	6-3
Tumbler and Drive Belt Removal	6-4
Installing Drive Belt	6-4
BAFFLES	6-5
TUMBLER BACK ASSEMBLY	6-5
TUMBLER BACK SEAL	6-5
ROLLER & BEARING ASSEMBLY	6-6
SECTION 7 - BLOWER & MOTOR DRIVE SYSTEM	7-1
CYCLING THERMOSTATS	7-1
HI-LIMIT THERMOSTAT	7-1
THERMAL FUSES	7-1
Checking the Thermal Fuse	7-2
BLOWER ASSEMBLY	7-2
Seal for Blower	7-2
Cover for Blower	7-2
Installing Blower Cover	7-3
Blower Wheel	7-3
Exhaust Duct Pipe	7-3
DRIVE MOTOR & IDLER ASSEMBLY	7-4
Motor Switch	7-4
Blower & Motor Assembly	7-4
Assembly Breakdown	7-5
Idler Arm Assembly	7-5
SECTION 8 - HEATING COMPONENTS	8-1
GAS VALVE ASSEMBLY	8-1
Function of Gas Valve System	8-1
Gas Conversions	8-3
Air Shutter Adjustment	8-3
Coil Replacement	8-3


INTRODUCTION

Each model will be covered separately in a section pertaining only to its control system and internal components. Because the basic structure for all dryers is the same, they will be generally covered without regard to model.

Models covered in this manual:

MD2300	MDE9806
MD2500	MDG9206
MD3500	MDG9306
MDE9206	MDG9606
MDE9306	MDG9806
MDE9606	

Model Number Breakdown:

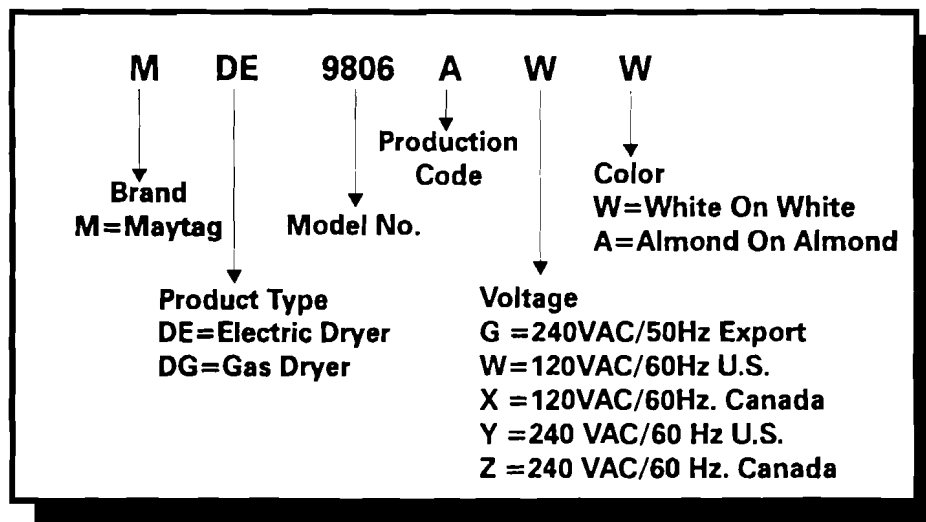

For additional information on material covered in this manual, including safety issues, contact:


**Maytag Appliances Sales Company -
Customer Service
240 Edwards Street, S.E.
Cleveland, TN 37311**

Phone: 423.472.3333
FAX: 423.478.6722

CONTENTS

SECTION 1 - GENERAL INFORMATION	1-1
PRE-INSTALLATION CONSIDERATIONS	1-1
Check Points For Proper Installation	1-1
Location Considerations	1-1
Alcove or Closet Installation	1-1
Manufactured Homes	1-2
INSTALLATION	1-2
Exhausting	1-2
Non-Exhausted Installations (U.S. Electric Dryers Only)	1-4
Gas Installation	1-4
Installation Codes	1-4
Electrical Requirements	1-4
GROUNDING POLARITY CHECKS	1-4
SPECIFICATIONS	1-5
General Component Exploded View	1-6
 SECTION 2 - ELECTRICAL COMPONENTS & TESTING	2-1
TEST EQUIPMENT	2-1
Analog Test Meter	2-1
Clamp-On Ammeter	2-1
Digital Test Meter	2-1
AC Voltage Sensor	2-1
Air Test Meter	2-1
Water Column Manometer	2-1
Manometers	2-2
ELECTRICAL TESTS	2-3
Voltage Checks	2-3
Voltage Check with Voltmeter	2-3
Using Voltmeter as a Continuity Tester	2-3
Door Switch	2-4
Timer & Console Switches	2-4
Drive Motor Check	2-4
Motor Test Cord	2-5
Drive Motor Test	2-5
Centrifugal Switch	2-5
 SECTION 3 - TROUBLESHOOTING GUIDE	3-1
FUNDAMENTAL CHECKS	3-1
Will Not Run	3-1
Will Not Dry	3-1
Will Not Shut-Off	3-2
Noisy and/or Vibration	3-3
DIRECT IGNITION SYSTEM	3-3

MD3500

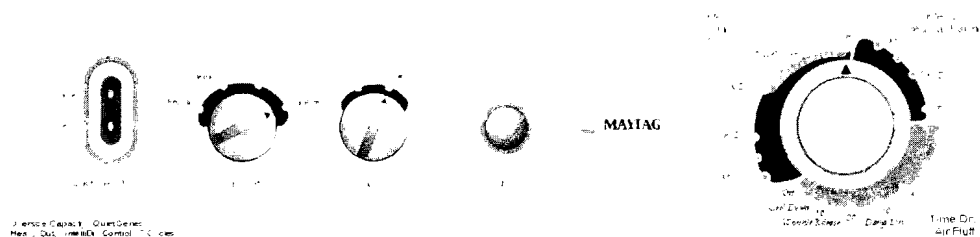


Standard Features plus 4 Temperature Selections, IntelliDry Dryness Control, Moisture Monitor, Wrinkle Out Cycle, Drum Light, and On/Off End-of-Cycle Signal.

Igniter	8-4
Gas Valve Removal	8-4
Orifice Removal	8-4
Combustion Cone Removal	8-4
Inlet Duct	8-6
HEATING ELEMENT & RELATED COMPONENTS	8-6


SECTION 9 - WIRING DIAGRAMS	9-1
MDE9206	9-1
MDE9206 CANADA	9-2
MDG9206	9-3
MDE9306	9-4
MDE9306 CANADA	9-5
MDG9306	9-6
MDE9606	9-7
MDG9606	9-8
MDE9806	9-9
MDG9806	9-10
MDE9806 CANADA	9-11
MDE2300	9-12
MDG2300	9-13
MDE2500	9-14
MDE2500 CANADA	9-15
MDG2500	9-16
MDE3500	9-17
MDE3500 CANADA	9-18
MDG3500	9-19

MDE2300

CIRCUIT	FUNCTION	OFF	RED FABRILE	IF	TIME CR.	OFF	PERMANENT PRESS
BL-GY	DRIVE MOTOR						
BU-BU	HEATER						
BU-OR	TIMER MOTOR						

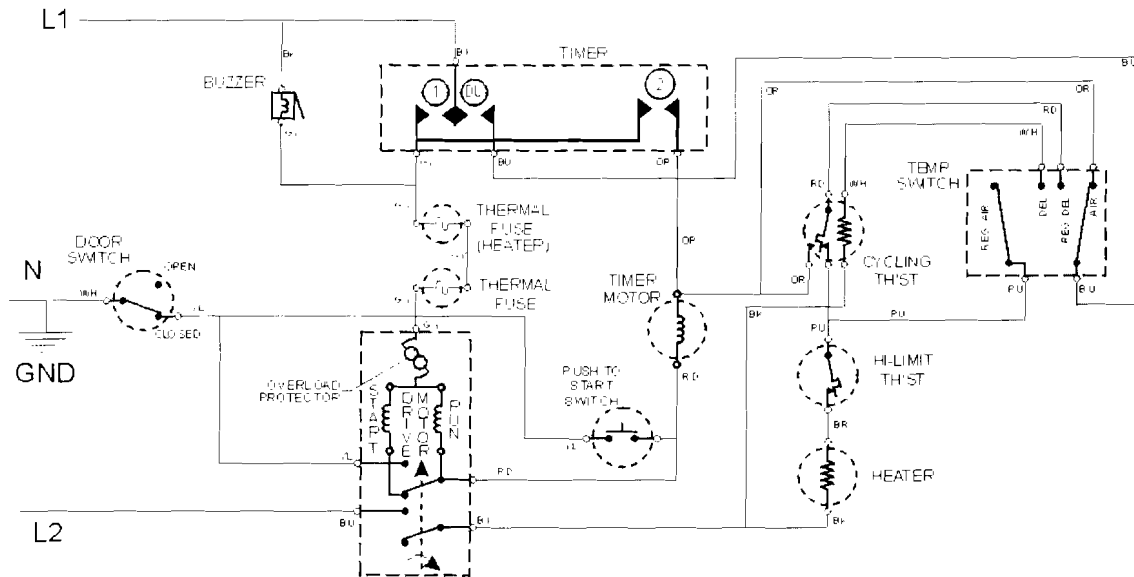

ELECTRICAL SCHEMATIC

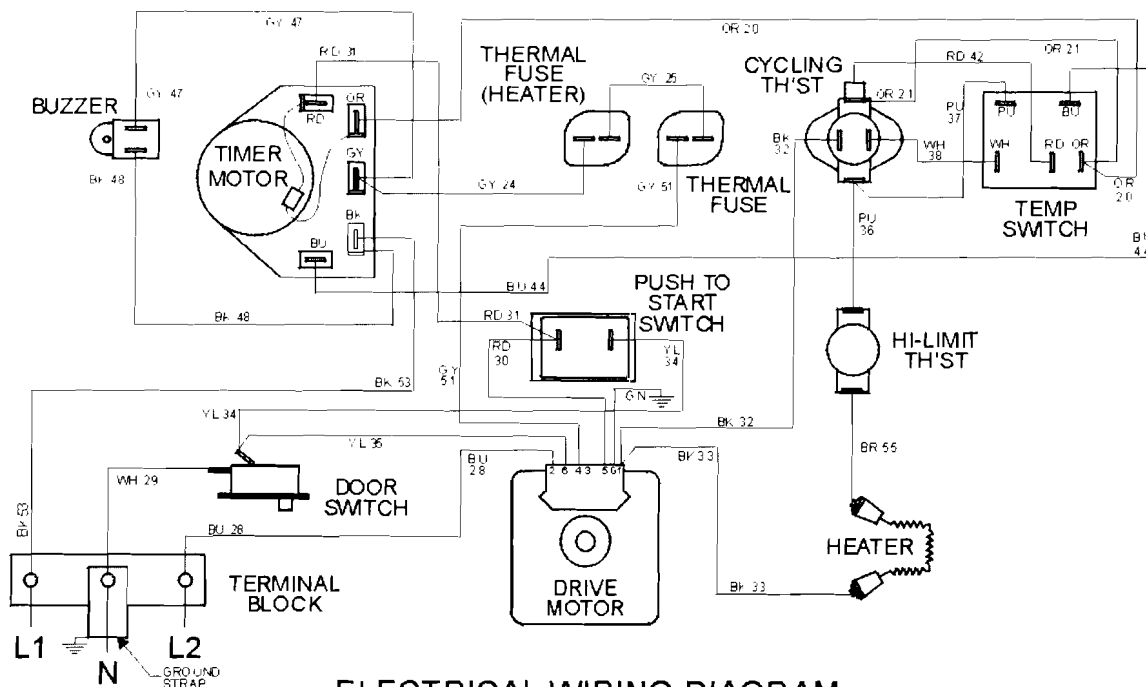


ELECTRICAL WIRING DIAGRAM

6 3704280 -0497

CONTROL FACIA


All models have the standard features: Oversize Capacity Plus Tub, Automatic Dry Control, Damp Dry, Time Dry/Air Fluff Option, Wrinkle Release, End-of-Cycle Signal, 4-Point Suspension and an Electronic Ignition with Safety Shut-Off Valve (Gas Only).

MD2300

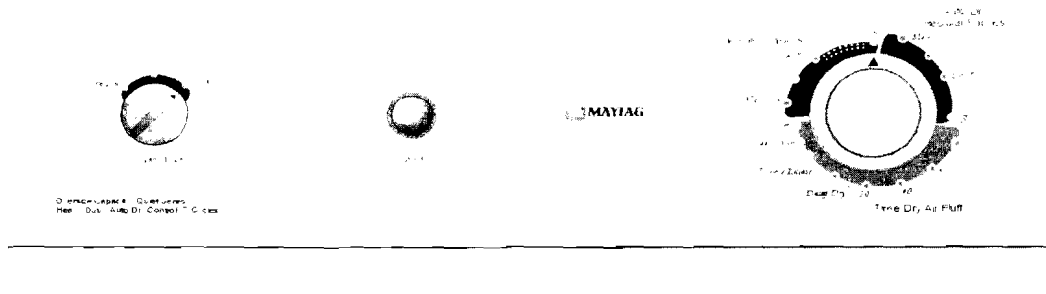

Standard features plus 3 temperature selections.

MD2500

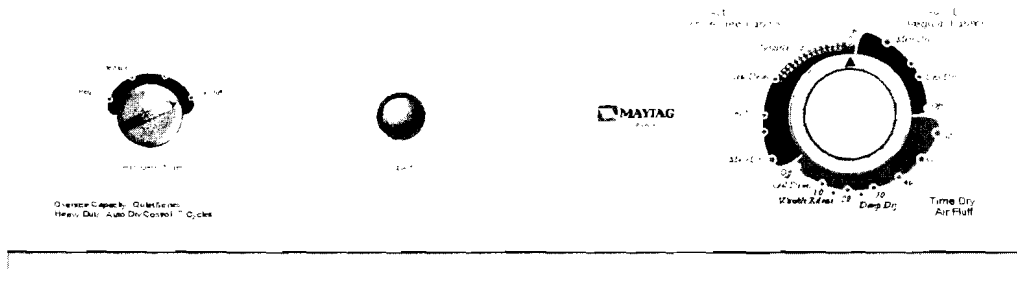


Standard features plus 4 temperature selections.


MDE2500

		OFF	REG FABRICS	OFF	TIME DRY	OFF	PERMANENT PRESS	OFF
	CIRCUIT	FUNCTION						
1	YL-GY	DRIVE MOTOR						
2	YL-OR	TIMER MOTOR						
3	BU-BU	HEATER						
4	PU-BU	BUZZER/HEATER						
4	PU-RD	BUZZER/PULSE*						

*ON 5 SECONDS EVERY 5 MINUTES

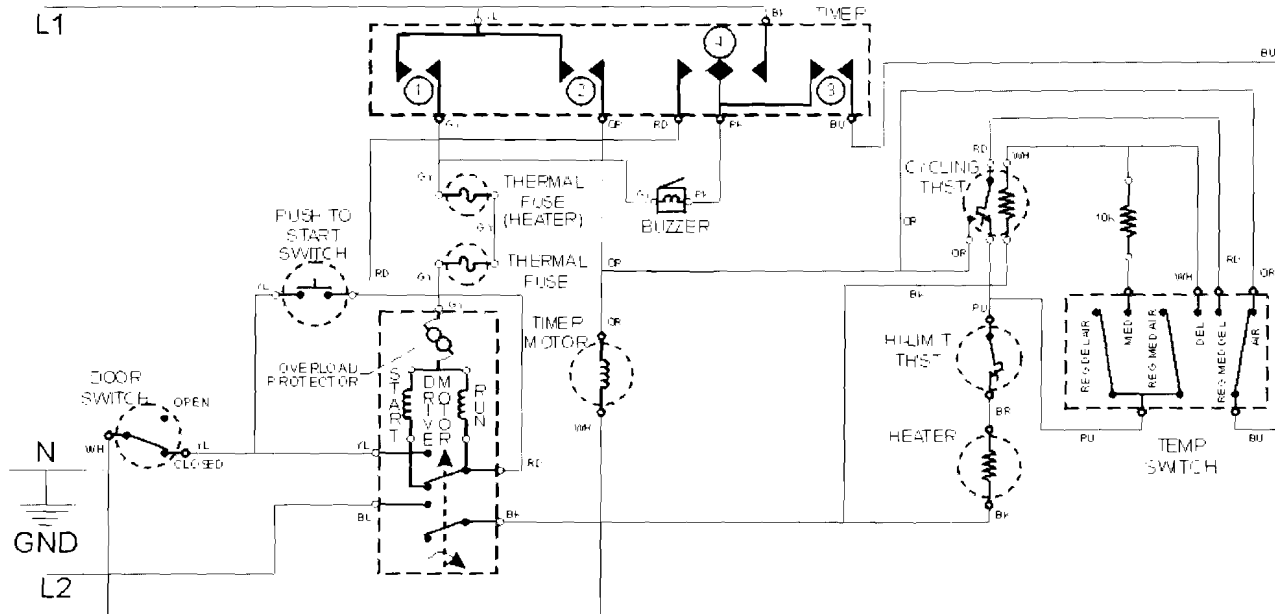

ELECTRICAL SCHEMATIC

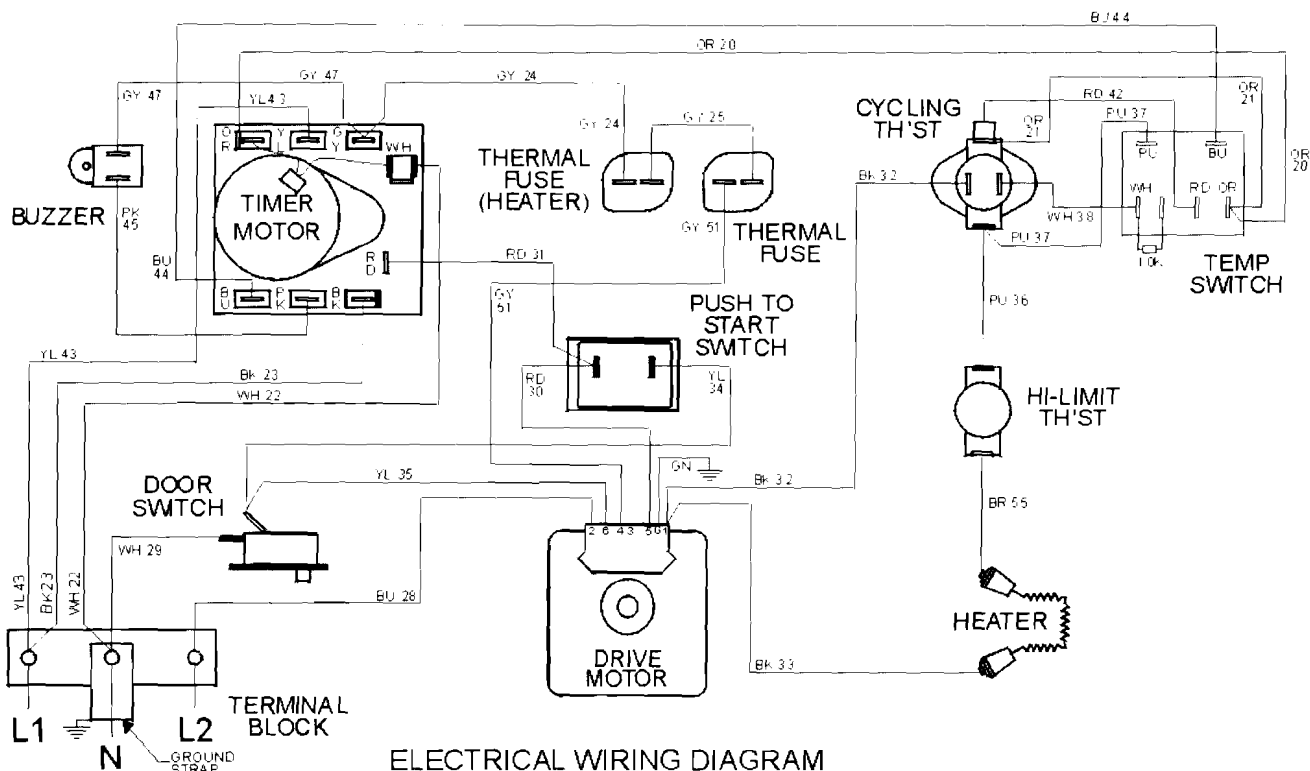

ELECTRICAL WIRING DIAGRAM

6 3401260


16010278
(16008878-01)

Section 9. Wiring Diagrams

9-14

©2000 Maytag Appliances Sales Company



	CIRCUIT	FUNCTION	OFF	REG FABRICS	OFF	TIME DRY	OFF	PERMANENT PRESS	PRESS CARE
①	GY-PK	CHIME							
	YL-GY	DRIVE MOTOR							
②	YL-OR	ELECTRONIC CONTROL							
③	BK-BU	HEATER							
④	BK-PU	PRESS CARE							

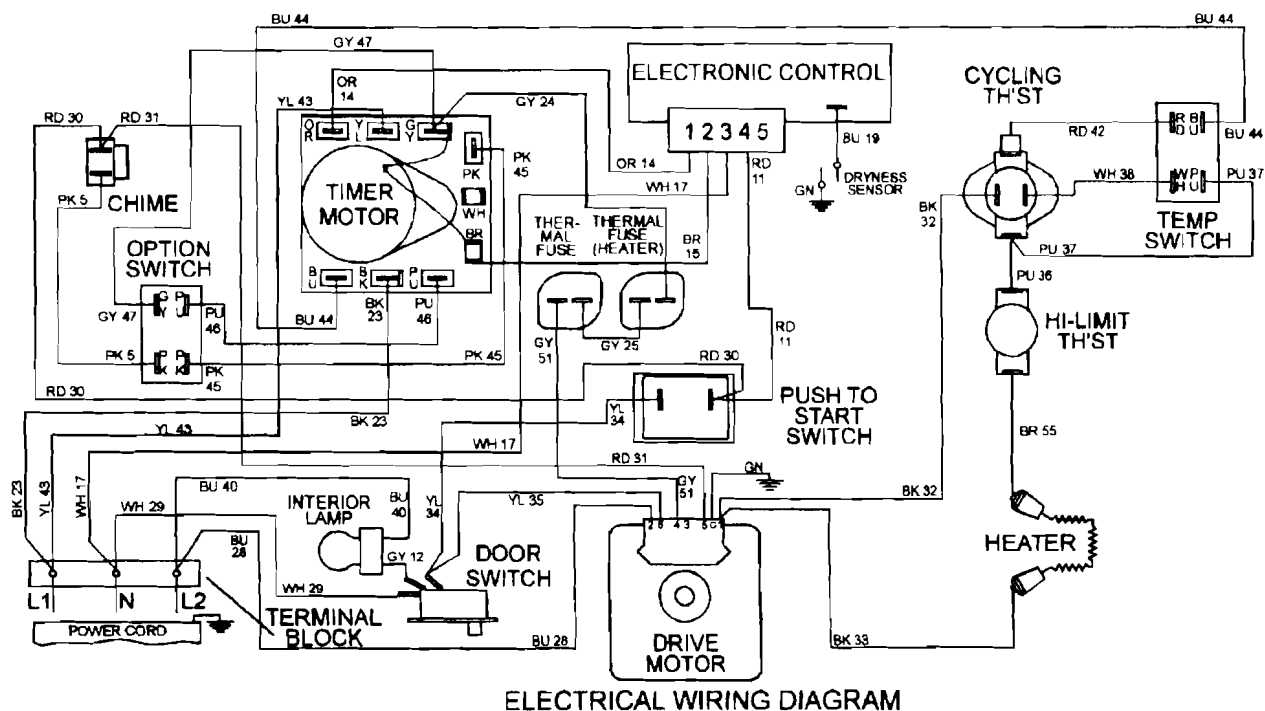

MDG2500

	CIRCUIT	FUNCTION	OFF	RES FABRICS	OFF	TIME DRY	OFF	PERMANENT PRESS	OFF
1	YL-GY	DRIVE MOTOR							
2	YL-RD	TIMER MOTOR							
3	BY-BU	HEATER							
4	PL-BU PL-RD	BUZZER/HEATER							

*ON 5 SECONDS EVERY 5 MINUTES

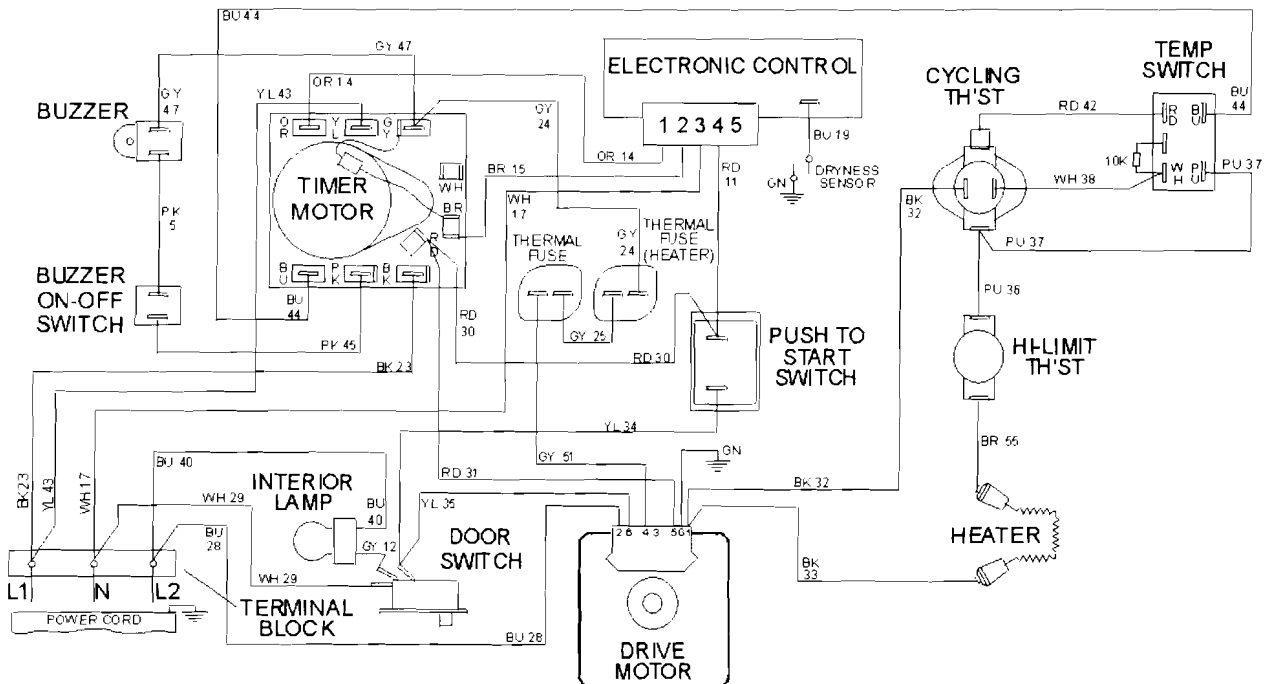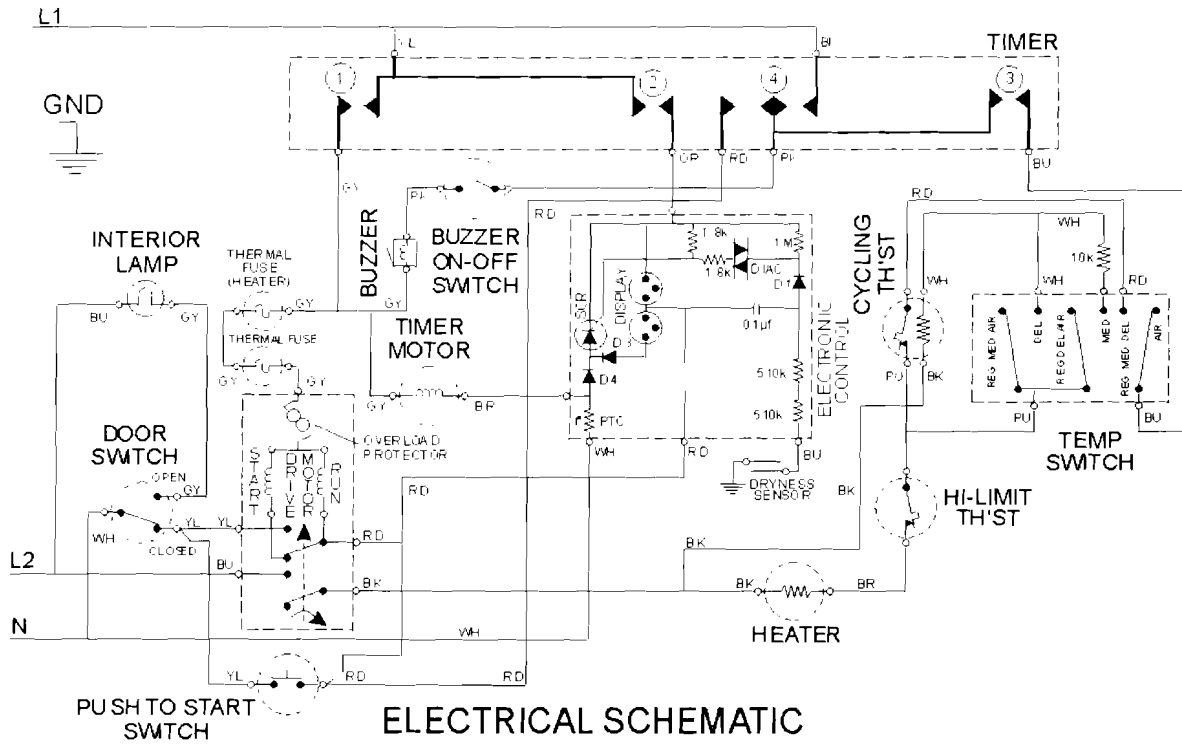


63711280-1098


ELECTRICAL WIRING DIAGRAM

MDG2300

CIRCUIT	FUNCTION	OFF	REG FABRICS	OFF	TIMER	OFF	PERMANENT PRESS
①	BK-GY DRIVE MOTOR						
	BK-BU HEATER						
②	BK-OR TIMER MOTOR						

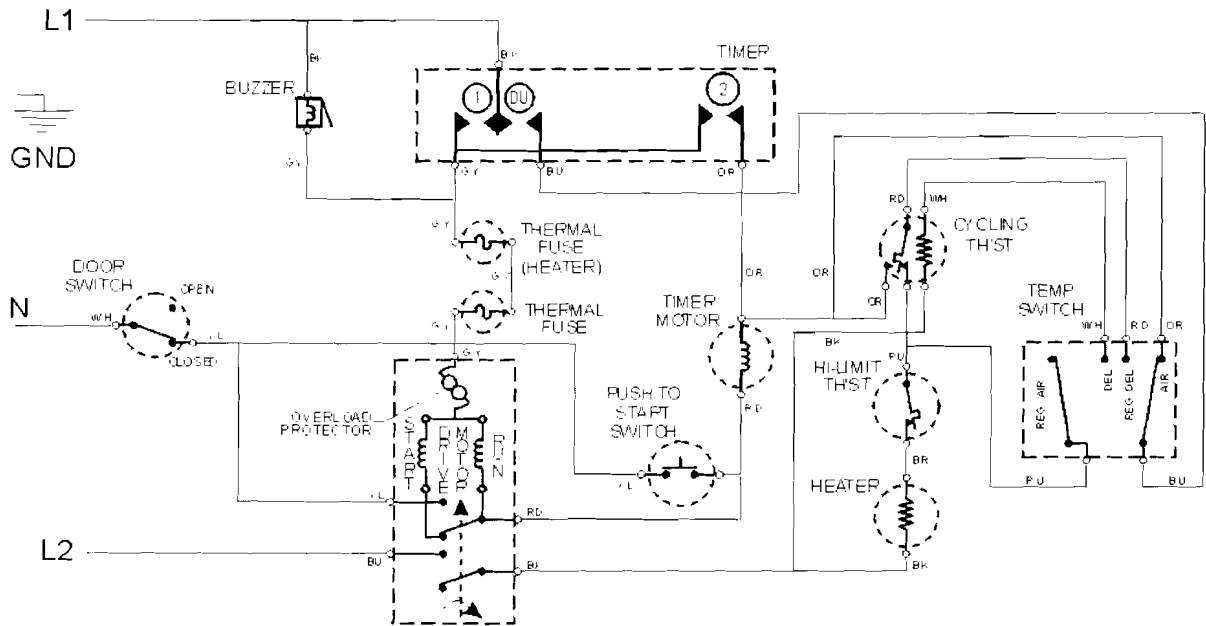

ELECTRICAL SCHEMATIC

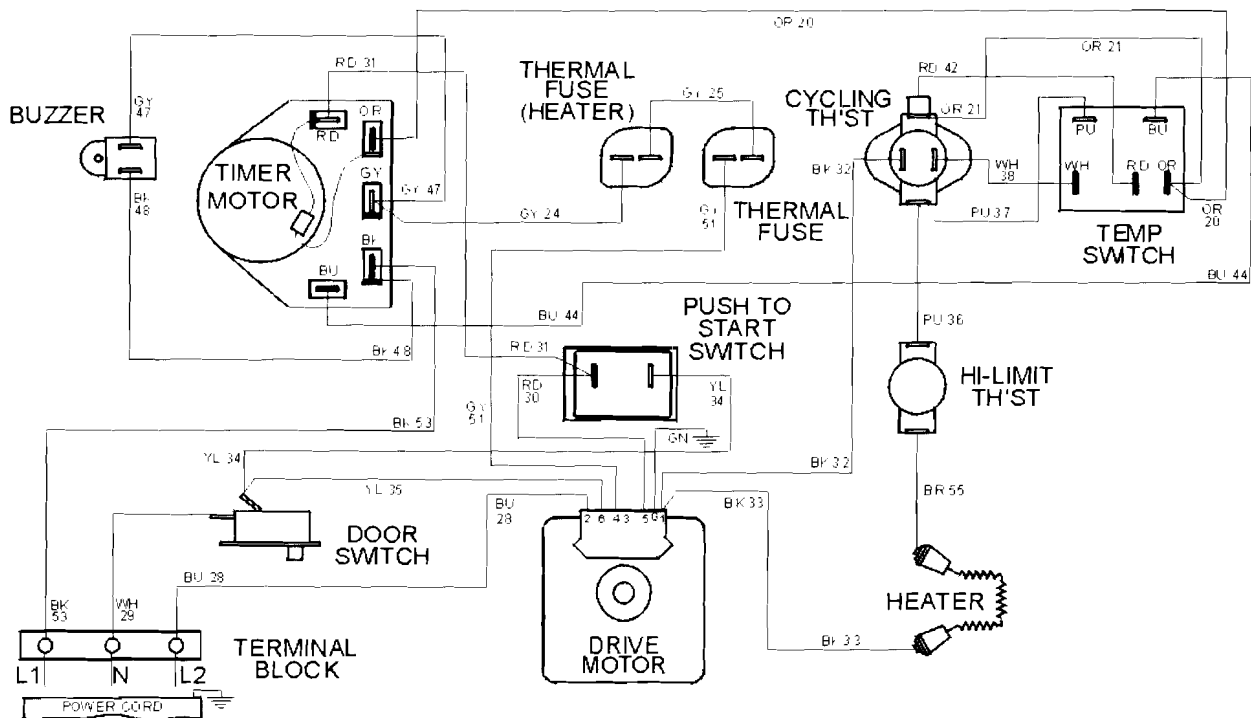


ELECTRICAL WIRING DIAGRAM

6 3704550-0497


MDE3500 CANADA

	CIRCUIT	FUNCTION	OFF	REG. FABRICS	OFF	TIME DRY	OFF	PERMANENT PRESS	
									PRESSURE
1	LOG1	DRIVE MOTOR							
2	LOG2	TIMER MOTOR							
3	BIBU	HEATER							
4	P1-BP P1-RD	BUZZER/HEATER BUZZER/PUSEPT							

* "ON" 4 SECONDS EVERY 15 MINUTES

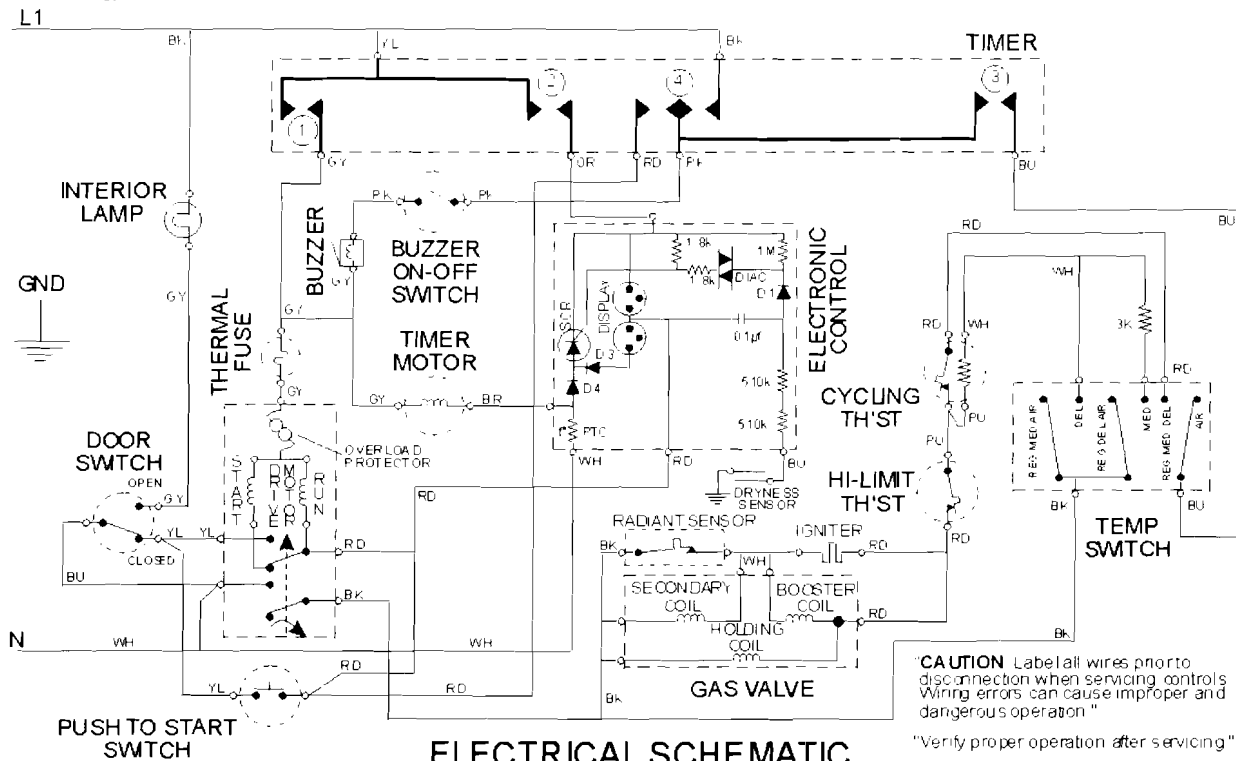

ELECTRICAL SCHEMATIC

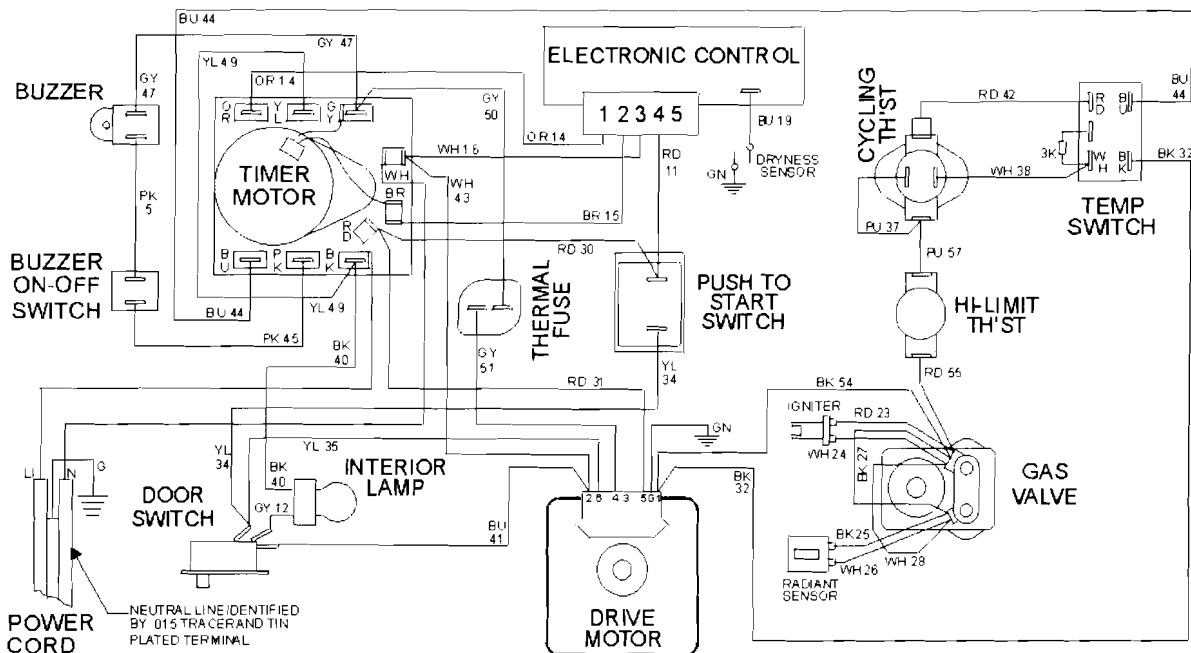

63710910-1098

ELECTRICAL WIRING DIAGRAM